


4T Clear Floor Two-Post Lift

Reliable Performance with Maximized Reach

EELRBP777APC2 / EELRBP777APC4

FEATURES

- ✓ 4T lifting capacity
- ✓ Hydraulic two-post lift provides efficient service solutions for cars, SUVs and vans, perfect for use in garages and tire shops
- ✓ Equipped with a padded overhead safety shut-off bar for vehicle protection during lifting
- ✓ Three-stage front and two-stage rear arms maximize your reach, allowing service for a wide range of vehicles
- ✓ Extremely rugged design made of a two-stage column profile guarantees utmost stability
- ✓ Ergonomically positioned controls on the primary column with clear push button indications
- ✓ Features a single-point safety lock release system
- ✓ Tested for reliability up to 3,000 cycles

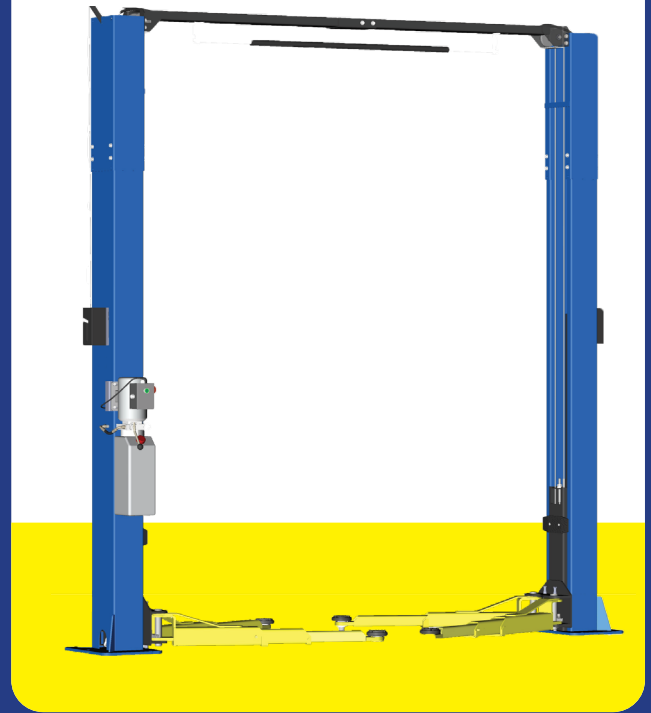

Model: EELRBP777AP			
Part Number			
EELRBP777APC2: 200-240 VAC1, 50/60Hz		EELRBP777APC4: 380-415 VAC3, 50Hz	
Type of Lift	Capacity	Capacity Per Arm	Overall Width
Symmetrical	4,000 kg	1,000 kg	3,440 mm
Width between Columns	Drive-Thru Width	Overall Height	Under Bar Clearance
2,790 mm	2,500 mm	3,596 mm	3,384 mm
Height to Lowered Lift Pad	Height to Raised Low Lift Pad	Front Arm Retracted Length	Rear Arm Retracted Length
110 mm	156 mm	720 mm	760 mm
Front Arm Extended Length	Rear Arm Extended Length	Maximum Lifting Height	Maximum Operating Pressure
1,320 mm	1,180 mm	1,860 mm	21 MPa
Hydraulic Oil Specification	Hydraulic Oil Capacity	Lift Time / Lower Time	
ISO 32/46 10WT	10L	40-60 / 25-70 seconds *Time may vary depending on the weight of the vehicle.	